


Technical Data Sheet  
TDS-04-09

## Nylofor® 3D Essential panels

### 1 Scope

This technical data sheet specifies the properties for Nylofor® 3D Essential panels made out of galvanised steel wires, welded and subsequently PVC coated. The panels have round horizontal wires and vertical "V-shaped" ones, see figure 1. The vertical wires have a barb at one side of the panel. The V-shapes are bent after PVC coating.

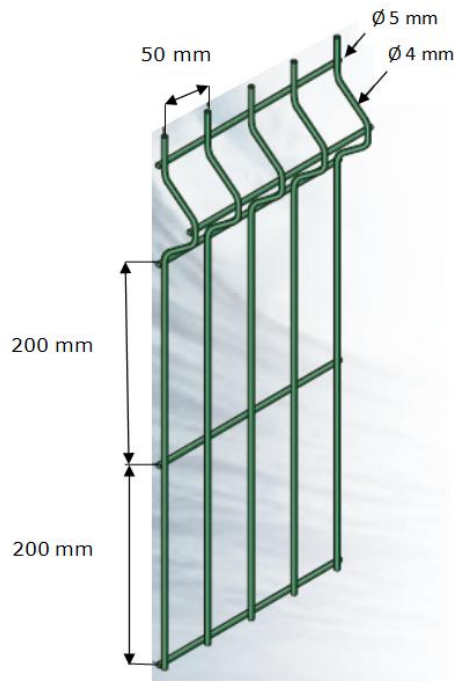

**Figure 1: Nylofor® 3D Essential**

|  |  |  |  |
|--|--|--|--|
| Page : 1 / 8<br>DATE : 19/08/2016<br>Replaces edition:<br>22/07/2016 | Made up by:<br>Werner Frans<br>Group Quality<br>Department | Approved by:<br>Annemie Dewitte<br>Plant Quality Manager | Approved by:<br>Willy Naesens<br>Group Quality Manager |
|--|--|--|--|

*The information and data given are typical for the product described. However technical changes are possible without any notice.*

Technical Data Sheet  
TDS-04-09

## Nylofor® 3D Essential panels

### 1.1 Normative references

- ISO 16120-2: Non-alloy steel wire rod for conversion to wire - Part 2: Specific requirements for general purpose wire rod.
- EN 1179: Zinc and zinc alloys – primary zinc.
- ISO 22034-2: Steel wire and wire products - Part 2: Tolerances on wire dimensions.
- EN 10223-7: Steel wire and wire products for fences, Part 7: Steel wire welded panels for fencing.
- EN 10245-2: Steel wires and wire products / organic coatings on steel wire part 2: PVC finished wire.

### 1.2 Definitions

- Nominal wire diameter: The diameter in mm to designate the wire.
- Real wire diameter: The average value of the minimal and the maximal diameter, measured in the same section of a straight piece of wire, by means of a micrometer accurate to 0,01 mm.
- Mesh sizes: The distance measured between the centres of two neighbouring wires.
- Line wires: The wires running in the longitudinal direction of the mesh.
- Cross wires: The wires running in the traverse direction of the mesh.

Page : 2 / 8  
DATE : 19/08/2016  
Replaces edition:  
22/07/2016

Made up by:  
Werner Frans  
Group Quality  
Department

Approved by:  
Annemie Dewitte  
Plant Quality Manager

Approved by:  
Willy Naesens  
Group Quality Manager

*The information and data given are typical for the product described. However technical changes are possible without any notice.*

**Technical Data Sheet  
TDS-04-09****Nylofor® 3D Essential panels****2 Raw Materials****2.1 Wire rod**

See table 1.

| <b>Table 1: Chemical composition</b> |         |
|--------------------------------------|---------|
| Element                              | %       |
| C                                    | ≤ 0,10  |
| Si                                   | ≤ 0,30  |
| Mn                                   | ≤ 0,70  |
| P                                    | ≤ 0,035 |
| S                                    | ≤ 0,035 |

The designation of the wire rod is based on grade C9D – ISO 16120-2.

**2.2 Zinc (Zinc used for galvanisation bath)**

Minimum 99,95% of pure zinc is used for galvanising, in accordance with Z3 of EN 1179.

**2.3 PVC**

The PVC is free of lead, cadmium and DOP.

|  |  |  |  |
|--|--|--|--|
| Page : 3 / 8<br>DATE : 19/08/2016<br>Replaces edition:<br>22/07/2016 | Made up by:<br>Werner Frans<br>Group Quality<br>Department | Approved by:<br>Annemie Dewitte<br>Plant Quality Manager | Approved by:<br>Willy Naesens<br>Group Quality Manager |
|--|--|--|--|

*The information and data given are typical for the product described. However technical changes are possible without any notice.*

## Nylofor® 3D Essential panels

### 3 Properties

#### 3.1 Wire diameter and tolerances

See table 2:

| <b>Table 2: Wire diameters and tolerances</b> |                      |            |                    |            |
|---|----------------------|------------|--------------------|------------|
|   | Horizontal wire (mm) |            | Vertical wire (mm) |            |
|   | Core wire            | PVC coated | Core wire          | PVC coated |
| Nylofor® 3D Essential                         | 4,30 ± 0,06          | 5,0 ± 0,20 | 3,30 ± 0,05        | 4,0 ± 0,20 |

The tolerances is in accordance with ISO 22034-2.

#### 3.2 Tensile strength of the wire

Vertical and horizontal wires: Min. 400 N/mm<sup>2</sup>.

#### 3.3 Mesh sizes and tolerances

Mesh spacing is measured between the centres of two neighbouring wires:

Distance between the horizontal wires: 200 mm, tolerance ± 4 mm.

Distance between the vertical wires: 50 mm, tolerance ± 3 mm.

The tolerances are in accordance with EN 10223-7.

#### 3.4 Welding strength

Weld shear strength is tested on four welds selected at random from one transverse wire of the panel.

The minimum average weld shear strength value meets the required 50% of the breaking strength of the wire as per EN 10223-7.

#### 3.5 Barbs

Nylofor® 3D Essential panels have a barb of 30 mm ± 2 mm at the topside of the panel. (See figure 1.)

|  |  |  |  |
|--|--|--|--|
| Page : 4 / 8<br>DATE : 19/08/2016<br>Replaces edition:<br>22/07/2016 | Made up by:<br>Werner Frans<br>Group Quality<br>Department | Approved by:<br>Annemie Dewitte<br>Plant Quality Manager | Approved by:<br>Willy Naesens<br>Group Quality Manager |
|--|--|--|--|

The information and data given are typical for the product described. However technical changes are possible without any notice.

Technical Data Sheet  
TDS-04-09

## Nylofor® 3D Essential panels

### 3.6 Overhangs

Overhangs: Maximum 2 mm.

### 3.7 Dimensions of the V-shapes

Number of V-shapes: See table 3.

Dimensions of V-shapes: See technical drawing, available on request.

### 3.8 Dimensions of the panel

Width: 2500 ± 5,0 mm.

Height: See table 3 and figure 2. Tolerance ± 5,0 mm.

**Table 3: Dimensions of the panel**

| Overall height of the panel (mm) | Number of horizontal wires | Number of V-shapes |
|----------------------------------|----------------------------|--------------------|
| 1030                             | 9                          | 2                  |
| 1230                             | 10                         | 2                  |
| 1530                             | 13                         | 3                  |
| 1730                             | 14                         | 3                  |
| 1930                             | 15                         | 3                  |
| 2030                             | 17                         | 4                  |

Page : 5 / 8  
DATE : 19/08/2016  
Replaces edition:  
22/07/2016

Made up by:  
Werner Frans  
Group Quality  
Department


Approved by:  
Annemie Dewitte  
Plant Quality Manager

Approved by:  
Willy Naesens  
Group Quality Manager

The information and data given are typical for the product described. However technical changes are possible without any notice.

Technical Data Sheet  
TDS-04-09

## Nylofor® 3D Essential panels

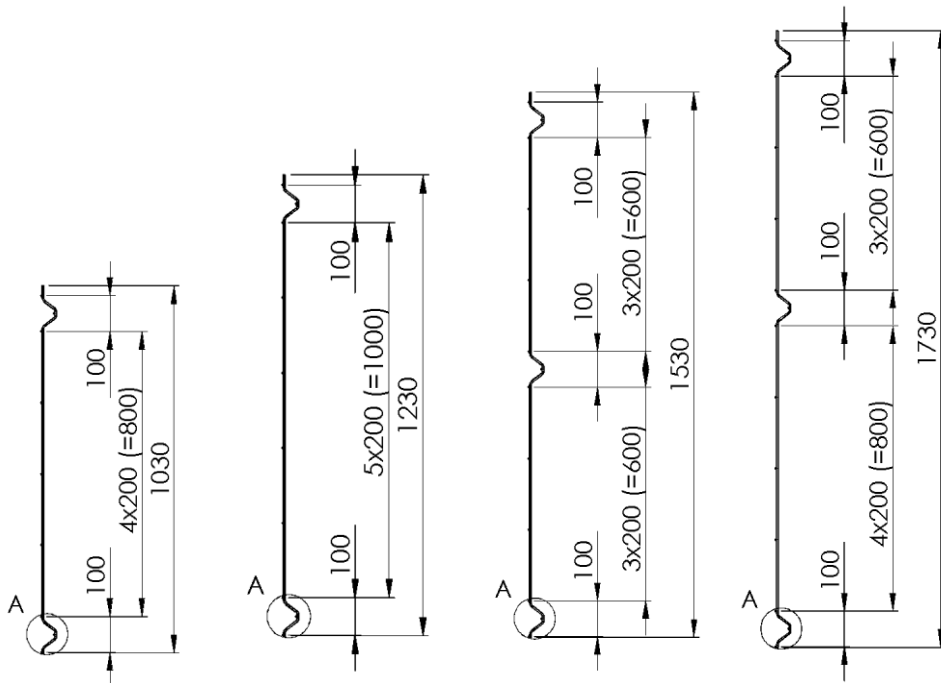

Page : 6 / 8  
DATE : 19/08/2016  
Replaces edition:  
22/07/2016

Made up by:  
Werner Frans  
Group Quality  
Department


Approved by:  
Annemie Dewitte  
Plant Quality Manager

Approved by:  
Willy Naesens  
Group Quality Manager

*The information and data given are typical for the product described. However technical changes are possible without any notice.*

Technical Data Sheet  
TDS-04-09

## Nylofor® 3D Essential panels

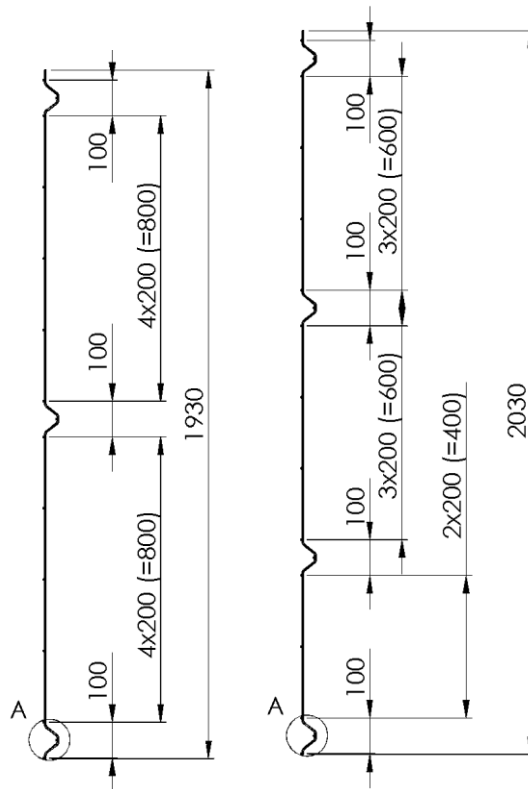

**Figure 2.**

## 4 Coating

### 4.1 Metallic coating

The wires are galvanized and the min. zinc weight for the horizontal and vertical wires is 30 g/m<sup>2</sup>.

|  |  |  |  |
|--|--|--|--|
| Page : 7 / 8<br>DATE : 19/08/2016<br>Replaces edition:<br>22/07/2016 | Made up by:<br>Werner Frans<br>Group Quality<br>Department | Approved by:<br>Annemie Dewitte<br>Plant Quality Manager | Approved by:<br>Willy Naesens<br>Group Quality Manager |
|--|--|--|--|

*The information and data given are typical for the product described. However technical changes are possible without any notice.*

**Technical Data Sheet**  
**TDS-04-09**

## Nylofor® 3D Essential panels

### 4.2 PVC coating

The PVC coating is fused and adhered to a primer that is cured onto the galvanized core wire, thus achieving an excellent bond between wire and PVC (in accordance with EN 10245 part 2 class 2b).

**Thickness:**

The total layer is minimum 200 µm thick.

**Colour:** Green RAL 6005 and RAL 7016

Other colours are available on request.

### 5 Form of delivery

The Nylofor® 3D Essential panels are packed on a wooden pallet, protected by UV resistible stretch or shrink foil.

An identification label with the Sapcode, product description, width and height of the panel, mesh sizes, number of panels, and color shall be put on each side of the pallet.

Number of panels per pallet, weight and sizes: See table 4.

| <b>Table 4: Form of delivery for Nylofor® 3D Essential panels</b> |                             |                          |   |                  |
|---|-----------------------------|--------------------------|---|------------------|
| Nominal dimensions of the panel (mm)                              | Number of panels per pallet | Weight of the panel (kg) | Sizes of the forwarding unit L x W x H (cm) | Sapcode RAL 6005 |
| 2500 x 1030   | 50                          | 6,3                      | 253 x 103 x 59                              | 7069589          |
| 2500 x 1230   | 50                          | 7,3                      | 253 x 123 x 59                              | 7069590          |
| 2500 x 1530   | 50                          | 9,3                      | 253 x 153 x 59                              | 7069591          |
| 2500 x 1730   | 50                          | 10,3                     | 253 x 173 x 59                              | 7069592          |
| 2500 x 1930   | 50                          | 11,3                     | 253 x 193 x 59                              | 7069594          |
| 2500 x 2030   | 50                          | 12,3                     | 253 x 203 x 59                              | 7069595          |

|  |  |  |  |
|--|--|--|--|
| Page : 8 / 8<br>DATE : 19/08/2016<br>Replaces edition:<br>22/07/2016 | Made up by:<br>Werner Frans<br>Group Quality<br>Department | Approved by:<br>Annemie Dewitte<br>Plant Quality Manager | Approved by:<br>Willy Naesens<br>Group Quality Manager |
|--|--|--|--|

*The information and data given are typical for the product described. However technical changes are possible without any notice.*